

TECHNICAL DETAILS



Width: 7727 mm



Length: 4419 mm



Weight: 5000kg



CAPACITY

Working load limit: 200t

OPTIONAL



Suitable rigging



Lifting triangle



Suitable cranes



Certificates



CONTACT

Please consult the Q3 Group Engineering department for more details:

Plaza 25C
4782 SL Moerdijk
T: +31 10 261 33 30
E: operations@q3-group.com

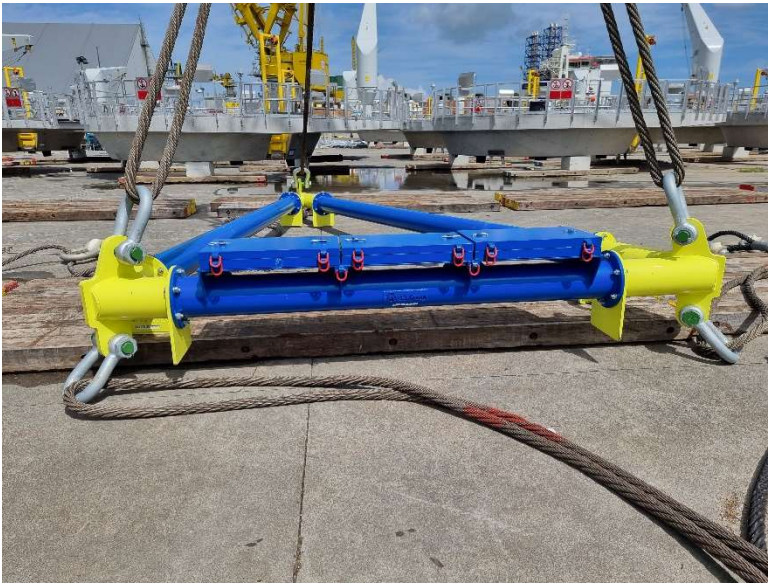


Figure 1, CWP loadspreader with rigging attached

OPTIONAL

Q3 offers suitable rigging equipment in order to use the loadspreader to its full potential. An example of suitable rigging is the lifting triangle as seen in figure 1. The lifting triangle offers the possibility to attach multiple slings or grommets onto the hook of the crane.

CAPABILITY

The Q3 CWP loadspreader is able to lift up to 200t in on and offshore conditions. Based on a straight forward design in which the COG is right beneath the hook of the crane for non-symmetrical platforms.

ADJUSTABILITY

In order to make sure the load is lifted level, weight can be placed on one side of the spreader to even slight imperfections. This will result in a optimal operation.



Figure 1, CWP lifted using the CWP loadspreader and CC6800 crane